

描述 / Descriptions

SOP-8 塑封封装 N 沟道场效应管。

N-Channel Enhancement Mode Field Effect Transistor in a SOP-8 Plastic Package.

特征 / Features

$V_{DS} = 40V$ $I_D = 15A$ ($V_{GS} = \pm 20V$)

$R_{DS(ON)}@10V \leq 8m\Omega$ (Typ. $6.4m\Omega$)



$R_{DS(ON)}@4.5V \leq 13m\Omega$ (Typ. $10m\Omega$)

无卤产品。HF Product.

用途 / Applications

用于电源管理，便携式设备和电池供电系统。

Power Management in Notebook computer, Portable Equipment and Battery powered systems.

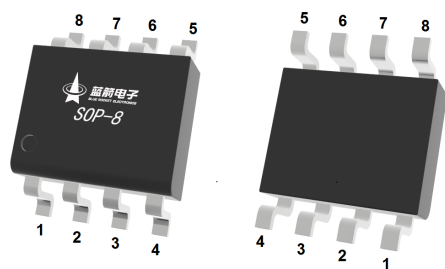内部等效电路 / Equivalent Circuit**引脚排列 / Pinning**

PIN 1 : S PIN 2 : S PIN 3 : S PIN 4 : G

PIN 5 : D PIN 6 : D PIN 7 : D PIN 8 : D

印章代码 / Marking

见印章说明。

See Marking Instructions.

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter		符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage		V_{DS}	40	V
Drain Current		$I_D(T_c=25^{\circ}\text{C})$	15	A
Drain Current - Pulsed		I_{DM}	68	A
Gate-Source Voltage		V_{GS}	± 20	V
Single Pulsed Avalanche Energy		E_{AS}	67.6	mJ
Avalanche Current		I_{AS}	13	A
Power Dissipation		$P_D(T_c=25^{\circ}\text{C})$	3.1	W
Operating and Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^{\circ}\text{C}$
Junction-to-Ambient	$t \leq 10$	$R_{\theta JA}$	40	$^{\circ}\text{C/W}$
Junction-to-Ambient	Steady-State		75	
Junction-to-Lead	Steady-State	$R_{\theta JL}$	24	

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=250\mu A$	40	47		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=40V$ $V_{GS}=0V$			1	μA
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 0.1	μA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	1.0	1.6	2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=20A$		6.4	8	m Ω
		$V_{GS}=4.5V$ $I_D=10A$		10	13	m Ω
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=1A$			1.2	V
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$		1890		pF
Output Capacitance	C_{oss}			135		
Reverse Transfer Capacitance	C_{rss}			120		
Gate resistance	R_g	$V_{GS}=0V$ $V_{DS}=0V$ $f=1MHz$		1.9		Ω
Total Gate Charge	Q_g	$V_{GS}=10V$ $V_{DS}=20V$ $I_D=15A$		40.7		nC
Gate Source Charge	Q_{gs}			3.1		
Gate Drain Charge	Q_{gd}			4.5		
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=20V$ $R_L=1.18\Omega$ $R_{GEN}=3.0\Omega$		10		ns
Turn-On Rise Time	t_r			13.9		
Turn-Off Delay Time	$t_{d(off)}$			40.5		
Turn-Off Fall Time	t_f			9		
Body Diode Reverse Recovery Time	t_{rr}	$V_{DD}=20V$ $I_F=10A$ $di/dt=200A/ms$		16.3		ns
Body Diode Reverse Recovery Charge	Q_{rr}			17		nC

电参数曲线图 / Electrical Characteristic Curve

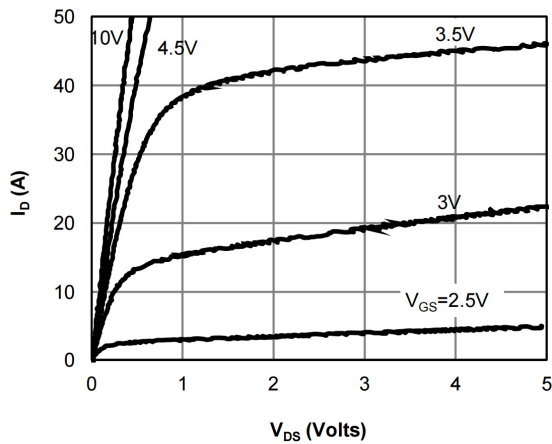


Figure 1: On-Region Characteristics

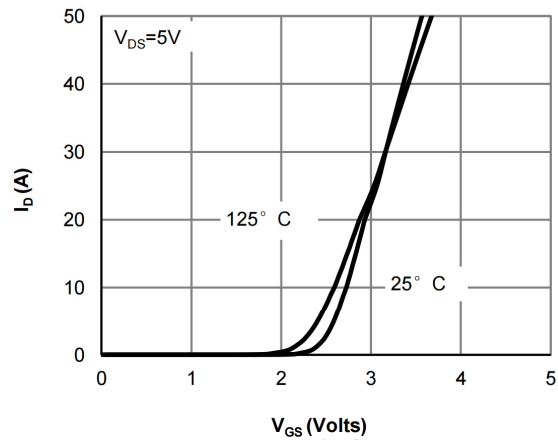


Figure 2: Transfer Characteristics

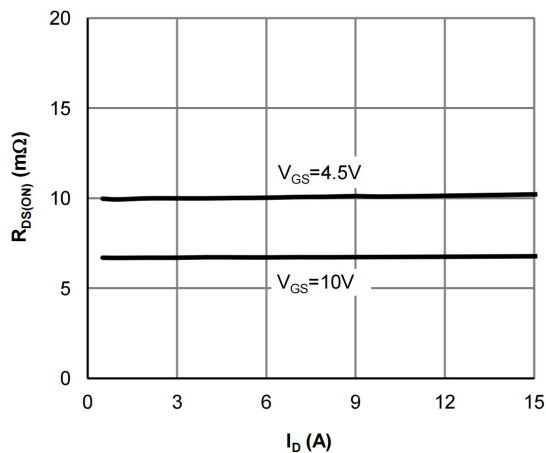


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

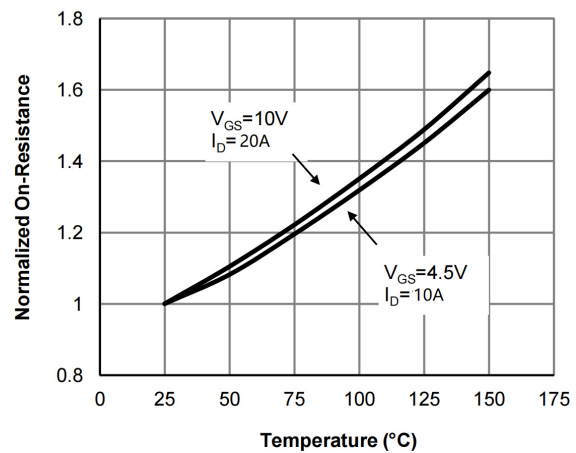


Figure 4: On-Resistance vs. Junction Temperature

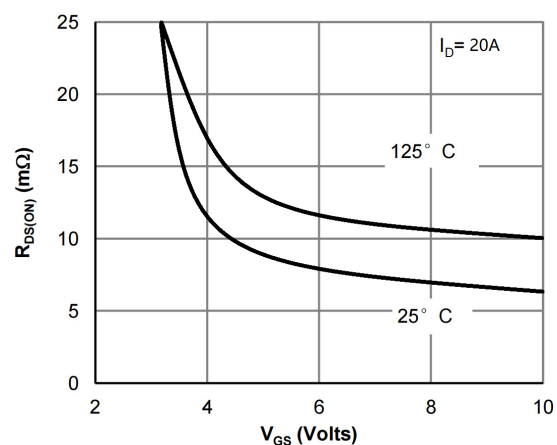


Figure 5: On-Resistance vs. Gate-Source Voltage

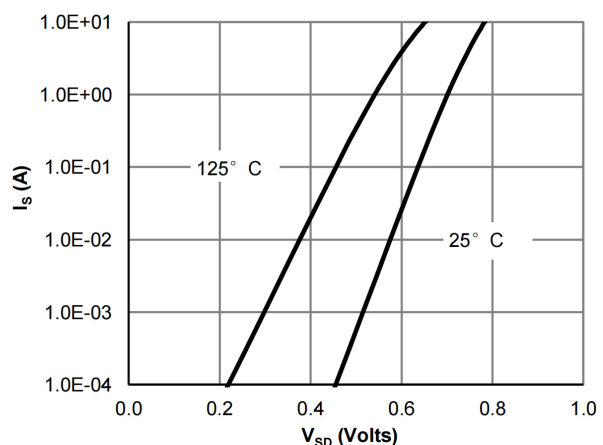


Figure 6: Body-Diode Characteristics

电参数曲线图 / Electrical Characteristic Curve

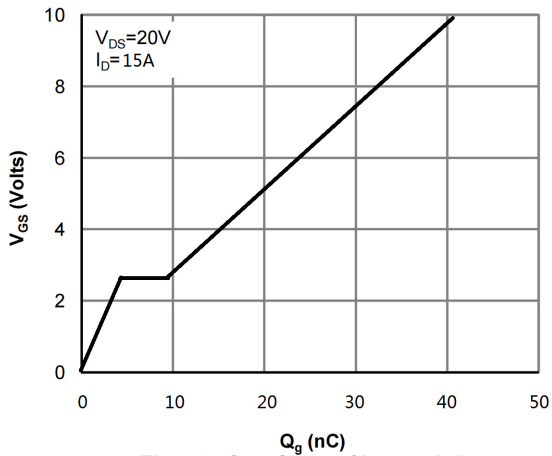


Figure 7: Gate-Charge Characteristics

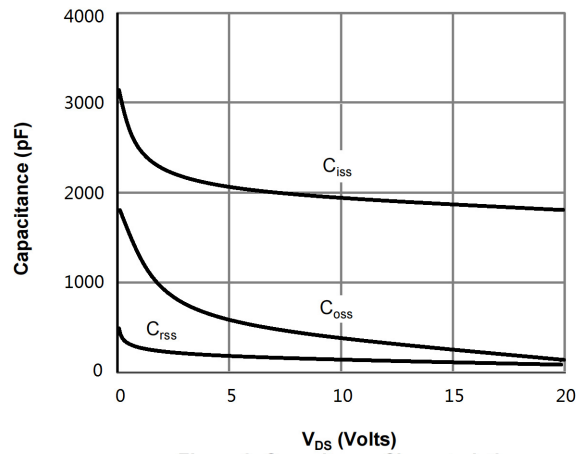


Figure 8: Capacitance Characteristics

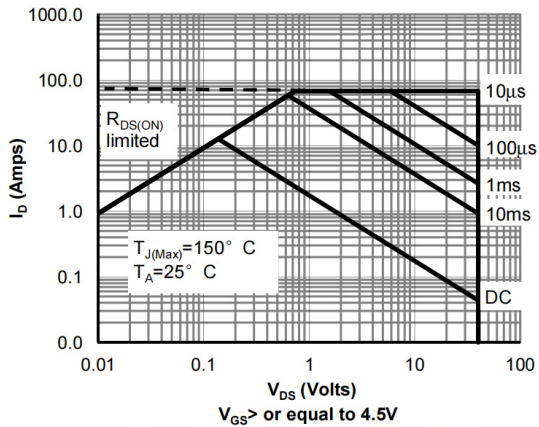


Figure 9: Maximum Forward Biased Safe Operating Area


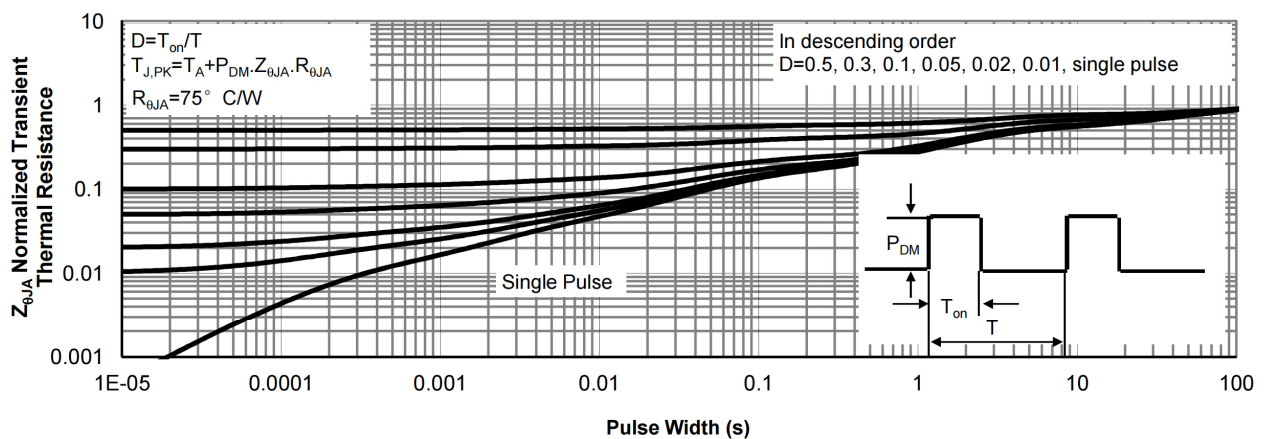


Figure 10: Normalized Maximum Transient Thermal Impedance

外形尺寸图 / Package Dimensions


SOP-8

Unit:mm

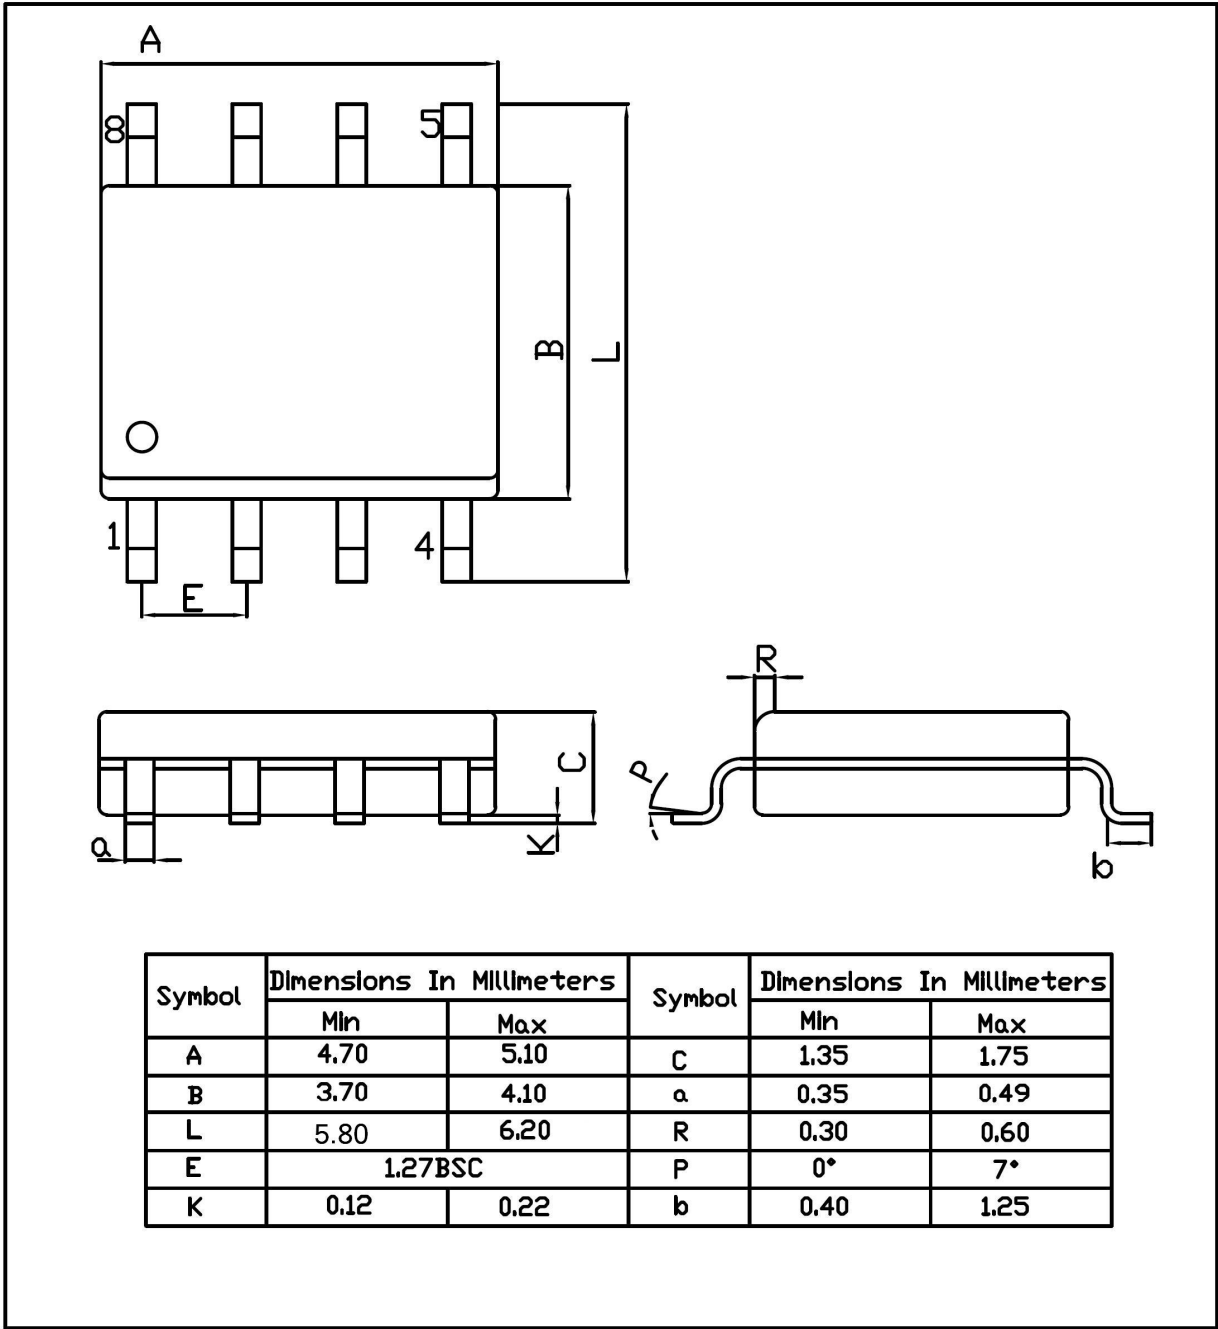



印章说明 / Marking Instructions

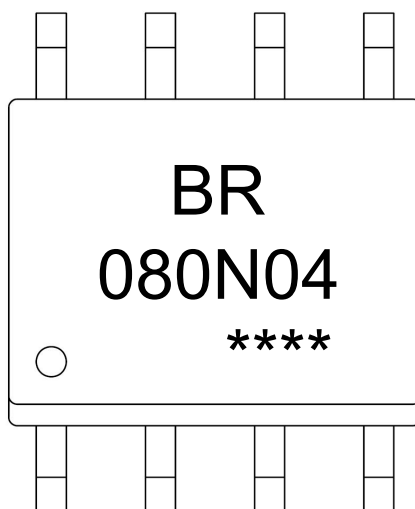

说明：

BR： 为公司代码

080N04： 为型号代码

****： 为生产批号代码，随生产批号变化


Note:

BR: Company Code

080N04: Product Type Code

****: Lot No. Code, code change with Lot No

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

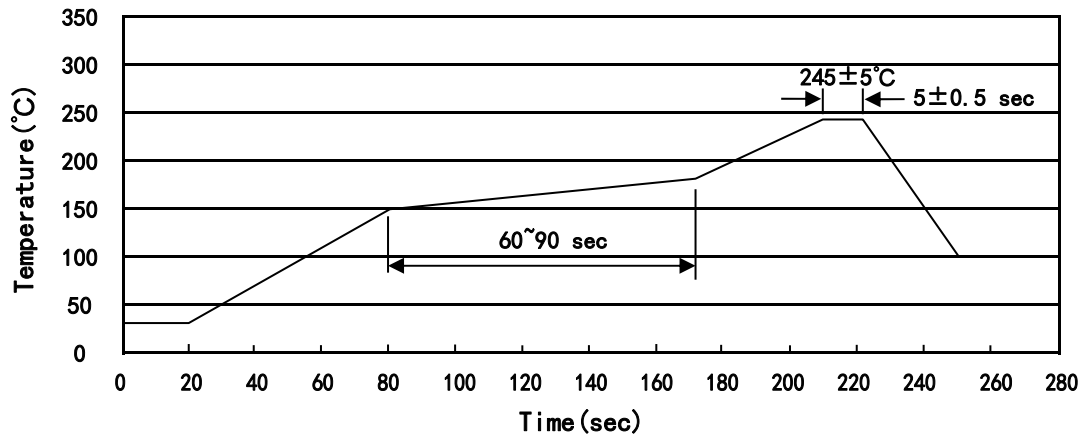

说明：

- 1、预热温度 150~180°C，时间 60~90sec;
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:150~180°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOP/ESOP-8	4,000	2	8,000	6	48,000	13" ×12	360×360×50	380×335×366

使用说明 / Notices

本文档中提供的所有信息均受法律免责声明的约束。

All information provided in this document is subject to legal disclaimers.